

TECHNICAL DESCRIPTION

FEATURES

- 380 - 520 MHz
- LOW LOSS
- HIGH DIRECTIVITY
- EXCELLENT COUPLING ACCURACY
- SURFACE MOUNT

APPLICATIONS

- LAND MOBILE RADIO (LMR) SYSTEMS
- RADAR COMMUNICATIONS
- CDMA 450 BASE STATION RF SUBSYSTEMS
- TV TRANSMITTERS




The Multi-Mix® CSD series provides 20 dB coupling at 450 MHz. The CSD series features accurate coupling factors, low VSWR, and high directivity. Very low insertion loss and high power handling capability make this series ideal for use in base station power amplifiers particularly in the main loop of the feedforward amplifiers. The CSD series is also ideal for use in RF sampling networks and control circuitry in high power transmitters.

CSD directional couplers are based on fusion bonded multilayer stripline structures. The fusion bonding process yields homogeneous monolithic dielectric structures with reliability, ruggedness, and electrical and thermal performance that are superior to conventional adhesive bonding techniques.

GENERAL SPECIFICATIONS

FREQUENCY RANGE (MHz)	INSERTION LOSS (dB MAX)	MEAN COUPLING (dB)	VSWR (MAX, ALL PORTS)	
380 - 520	0.25	20 ± 1.0	1.15:1	
FREQUENCY SENSITIVITY (dB MAX)	DIRECTIVITY (dB MIN)	AVERAGE POWER (WATTS, MAX.)	RF INTERFACE	OPERATING TEMPERATURE
± 0.30	16	250	Leadless Surface Mount	-55° TO +85° C

PACKAGE OUTLINE

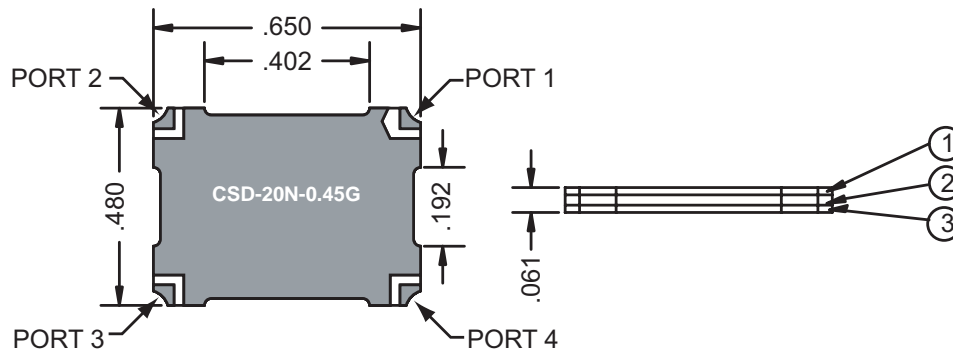

THE MULTI-MIX MICROTECHNOLOGY® GROUP IS ISO 9001:2000 REGISTERED



U.S. Patent 6,099,677 and other Patents Pending.

