

TECHNICAL DESCRIPTION

FEATURES

- 350 - 435 MHz
- LOW LOSS
- HIGH ISOLATION
- EXCELLENT PHASE/AMPLITUDE BALANCE
- HIGH POWER HANDLING
- SURFACE MOUNT



RoHS Compliant


The QHDZ-2N-0.392G series is a member of the Multi-Mix QHDZ family of 3-dB 90° couplers for use in the 350-435 MHz range. The QHDZ-2N-0.392G exhibits low insertion loss, low VSWR, and high isolation. Excellent phase and amplitude balance and high RF power handling capability make this series ideal for use in base station power amplifiers in particular and radio transceivers, receiver/antenna multi-couplers and RF signal distribution and processing equipment in general.

The construction of QHDZ quad hybrids is based on fusion bonded multiplayer stripline structures. The fusion bonding process yields homogeneous monolithic dielectric structures with reliability, ruggedness, and electrical and thermal performance that are superior to conventional adhesive bonding techniques.

GENERAL SPECIFICATIONS

FREQUENCY RANGE (MHz)		INSERTION LOSS (dB MAX)	VSWR (MAX)	AMPLITUDE BALANCE (dB MAX)
350 - 435		0.25	1.12:1	±0.2
ISOLATION (dB MIN)	PHASE BALANCE (MAX)	INPUT POWER (CW, MAX)	RF INTERFACE	OPERATING TEMPERATURE
27	90 ± 2°	125 W	Surface Mount	-55° - +95° C





PACKAGE OUTLINE / TAPE & REEL ORIENTATION

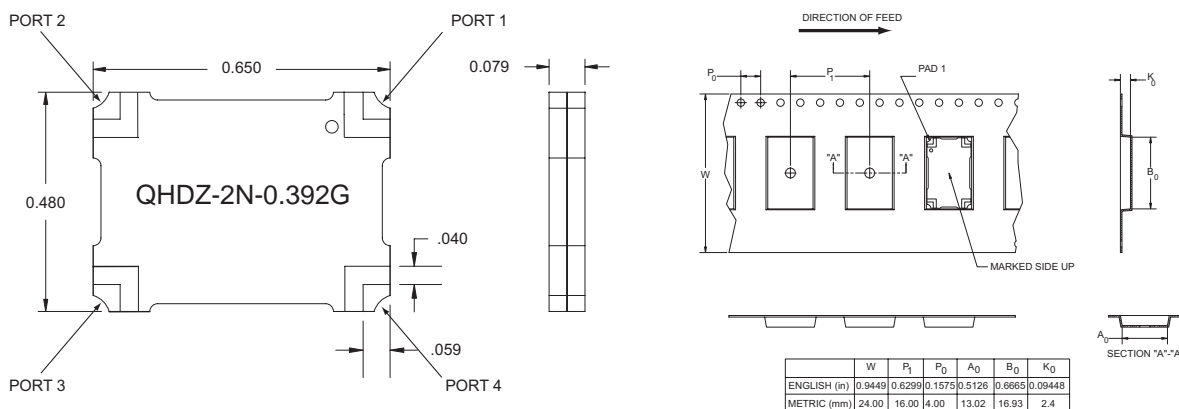


THE MULTI-MIX MICROTECHNOLOGY® GROUP IS ISO 9001:2000 REGISTERED

U.S. Patent 6,099,677 and other Patents Pending.

TYPICAL PERFORMANCE

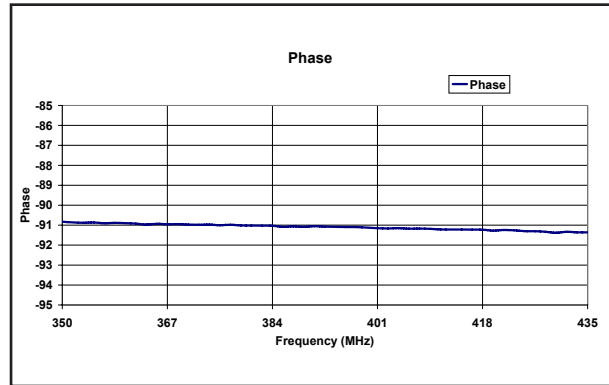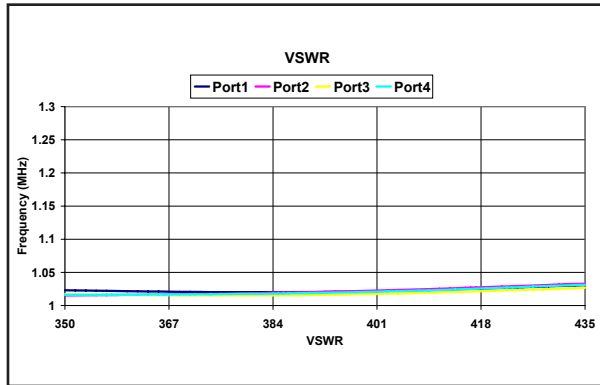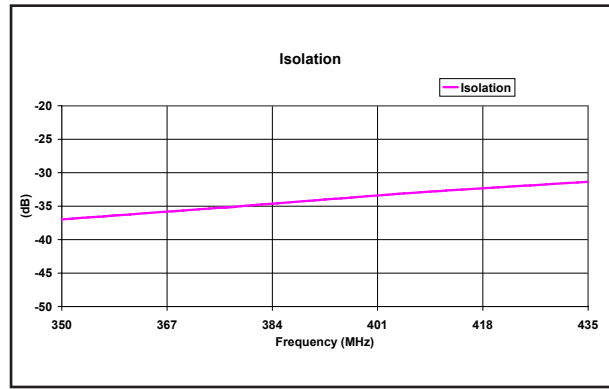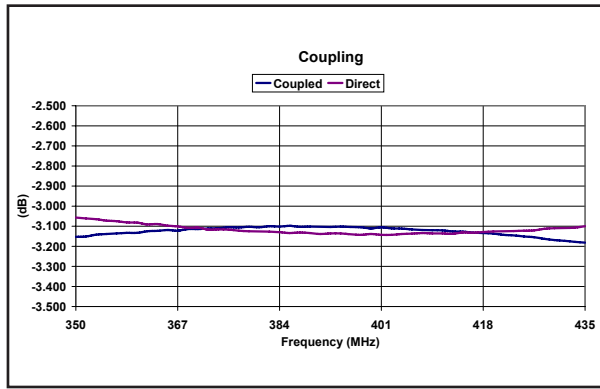

MOUNTING CONFIGURATION

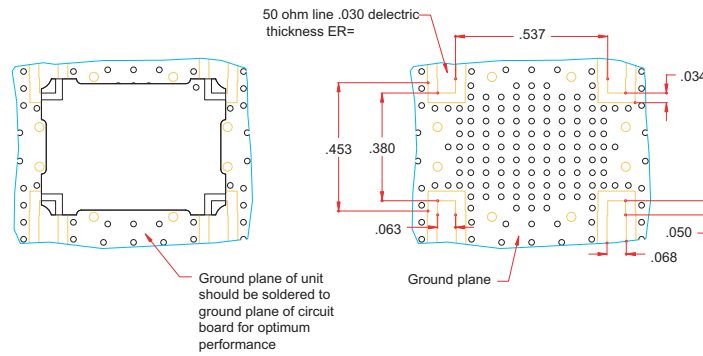

TRUTH TABLE

	1	2	3	4
1	Input	Iso	-90°	0°
2	Iso	Input	0°	-90°
3	-90°	0°	Input	Iso
4	0°	-90°	Iso	Input