


QHK-4R-G Series 90° POWER DIVIDERS / COMBINERS

6 to 40 GHz / Multi-Octave Bandwidth / Low Insertion Loss / High Isolation / K-Connectors



PRINCIPAL SPECIFICATIONS

Model Number	Frequency Range, GHz	Isolation, dB, Min.	Amplitude Balance, dB, Max.	Phase Tolerance, Max.	Insertion Loss, dB, Max.	VSWR, All Ports Max.	Weight oz.(g) Nom.
QHK-4R-23G	6 - 40	13	2.0	90° ± 10°	1.6	2.0:1	1.8 (50)
QHK-4R-29G	18 - 40	13	2.0	90° ± 10°	1.6	2.0:1	1.8 (50)


General Notes:

1. The QHK-4R series of 3 dB quadrature hybrid couplers covers 6 to 40 GHz using stripline circuits for high isolation and low loss.
2. These units are provided with K-series connectors for high reliability and low VSWR to beyond 40 GHz.

GENERAL SPECIFICATIONS

Coupling: - 3 dB nom.
 Impedance: 50 Ω nom.
 CW Input: 1 W max.
 Operating Temperature: - 55° to +85°C

Package Outline

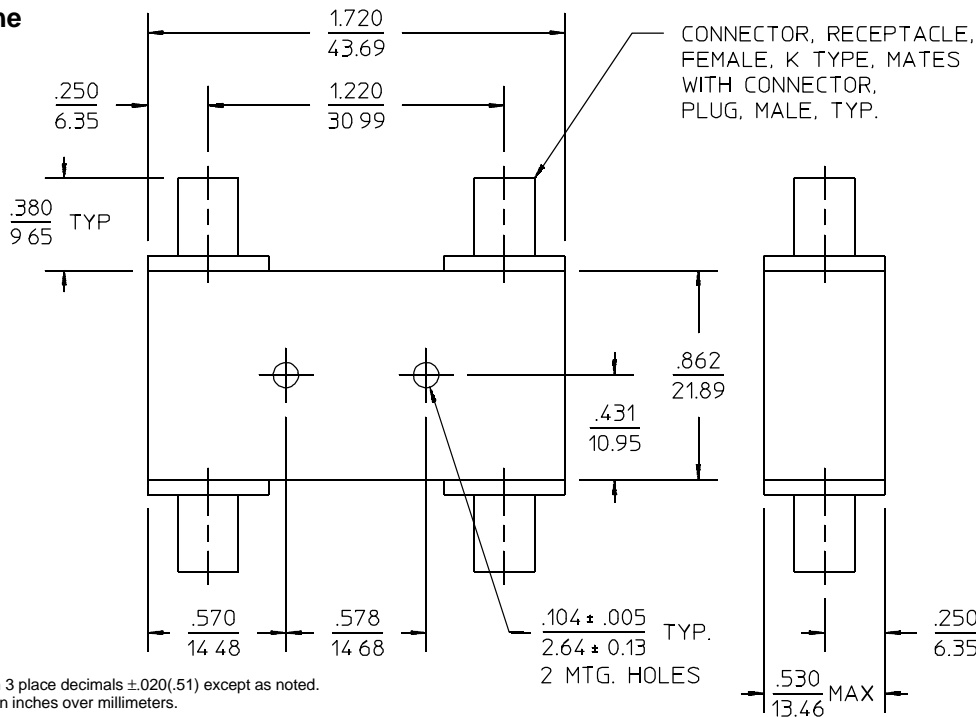

NOTES: 1. Tolerance on 3 place decimals ±.020(.51) except as noted.
 2. Dimensions in inches over millimeters.

20Feb96